

Important Information:

The CPL205 Door Patch Lock is designed for European profile cylinder applications. The Patch Lock is designed for corner application at the top and/or bottom of the door and jamb mounting. Matches the CPF Patches in size and appearance. Cylinder sets are "bottom load" - access is required underneath the door to adjust or change cylinder set.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) thick tempered safety glass


Construction: - High density casting - High density casting lock

Glass Fabrication Required: Cut-Out and Hole Required - See Reverse

Includes: Gaskets, Screws, Template, Keyed Cylinder, and 3 Keys

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel

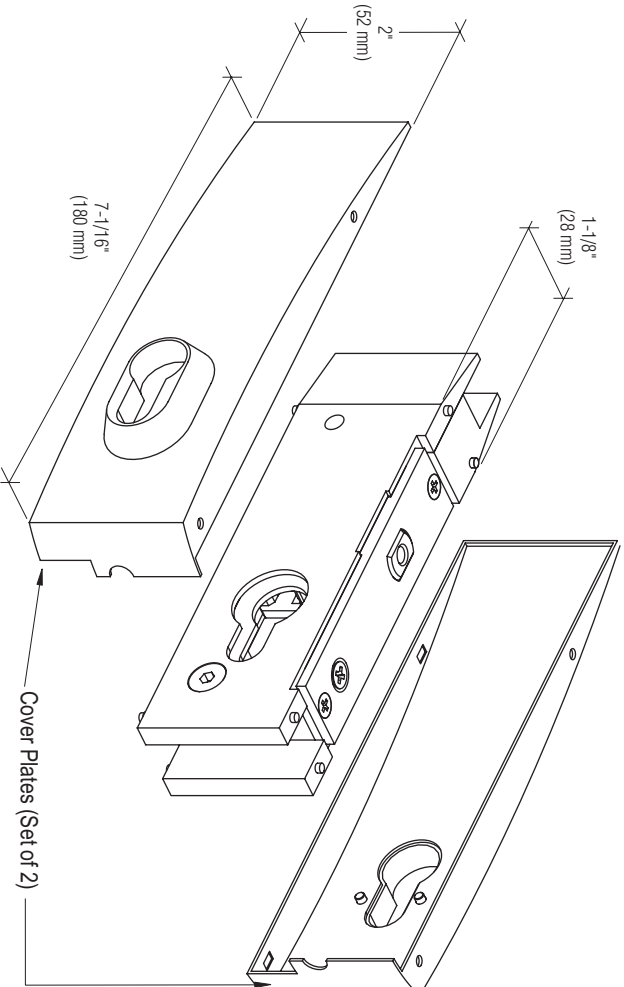

Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side

For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of tempered safety glass only.

SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy



CRL CURVED FACE PLATE BOTTOM PATCH LOCK

FOR CORNER APPLICATIONS

Cat. No. CPL205

C.R. Laurence Co., Inc.
crlaurence.com


For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144;
Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7700. Toll free fax (800) 587-7501.

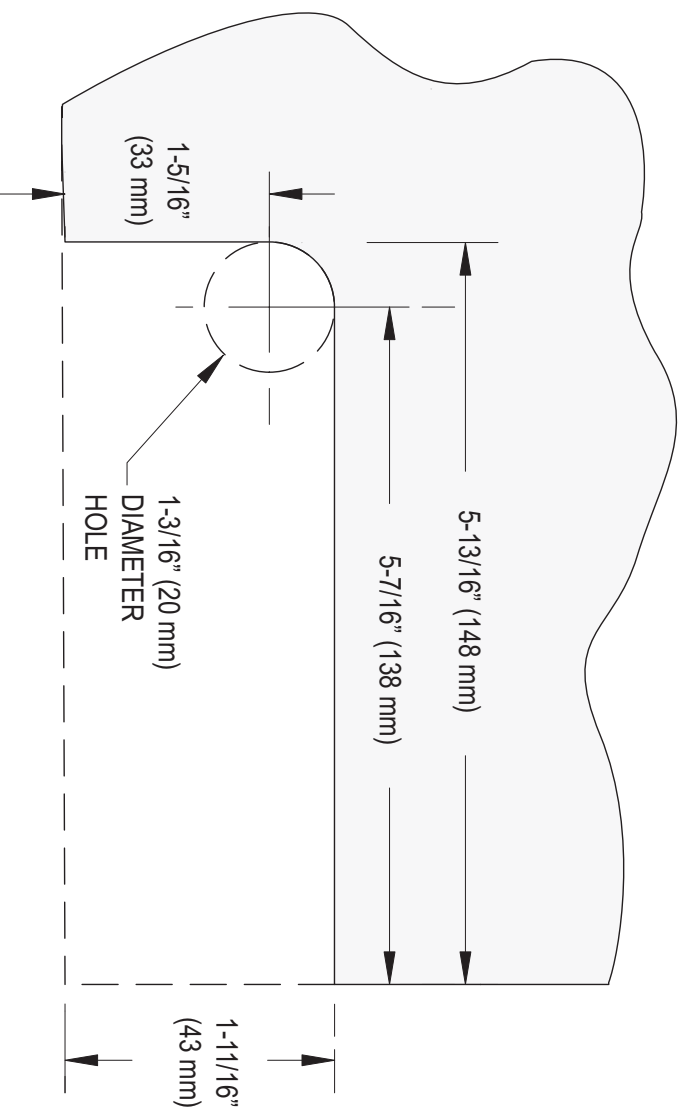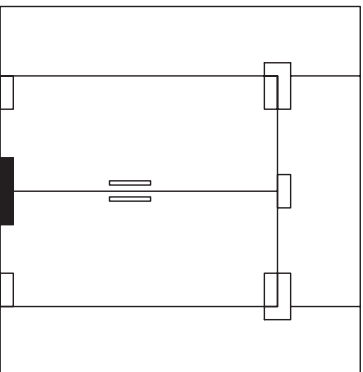

CRL CURVED FACE PLATE BOTTOM PATCH LOCK

DOOR CORNER LOCK WITH KEYED CYLINDER AND 3 KEYS

Cat. No. CPL205

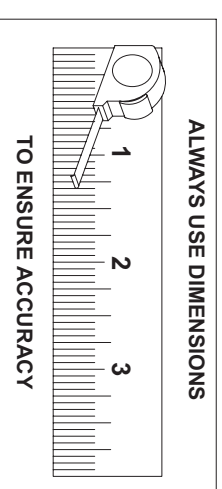

NOT TO SCALE