



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY


Specifications:

Material: Solid brass
Glass Thickness Range: 3/8"(10mm) to 1/2"(12mm)
Hole Size Required: 3/4" (19mm)
Includes: Mounting screws and gaskets


HEAVY DUTY GLASS CLAMPS

Beveled 135° Glass Clamp

CAT. No.BGC135

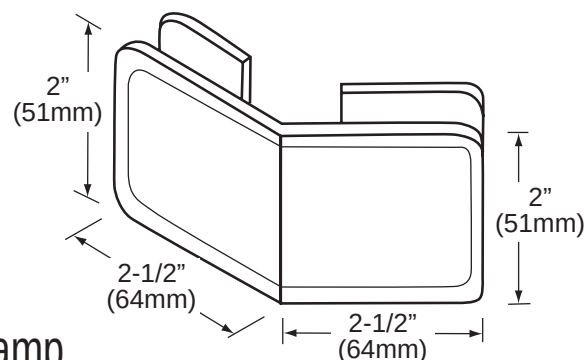

FRONT VIEW

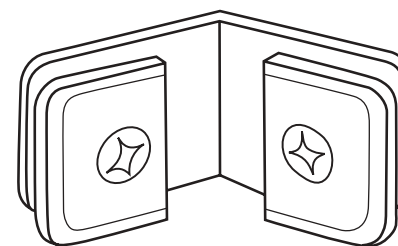


REAR VIEW

Template Shown on Next Page


HEAVY DUTY GLASS CLAMPS

Square 135° Glass Clamp

CAT. No.SGC135

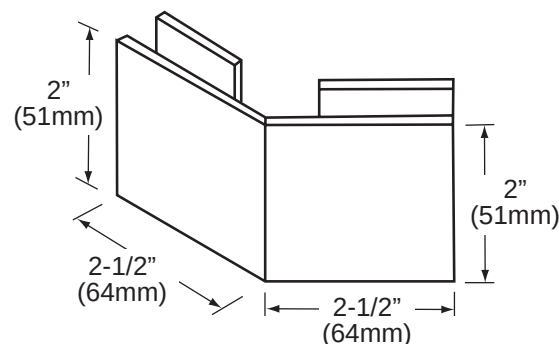

FRONT VIEW

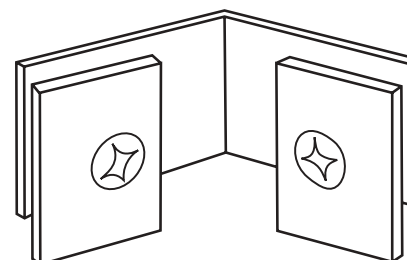


REAR VIEW

Template Shown on Next Page



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

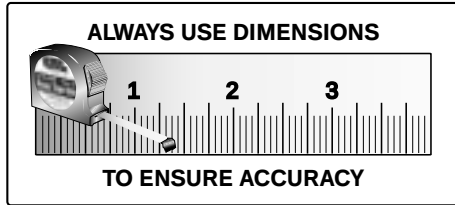

GLASS CLAMPS

The Template Options on this Page
Apply to the Following Clamps:
Beveled 135° Glass Clamp


CAT. No. BGC135

Square 135° Glass Clamp

CAT. No. SGC135


TYPICAL INSTALLATION

Important: Project measurements
from the edge of the glass.

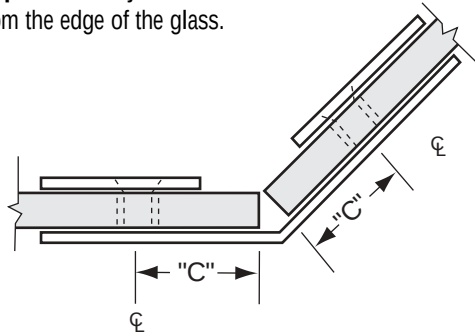


Glass Thickness	"C"* Measurement
3/8"(10mm)	1-5/16"(33mm)
1/2"(12mm)	1-1/4"(32mm)

TEMPLATE OPTION FOR SQUARE CUT GLASS

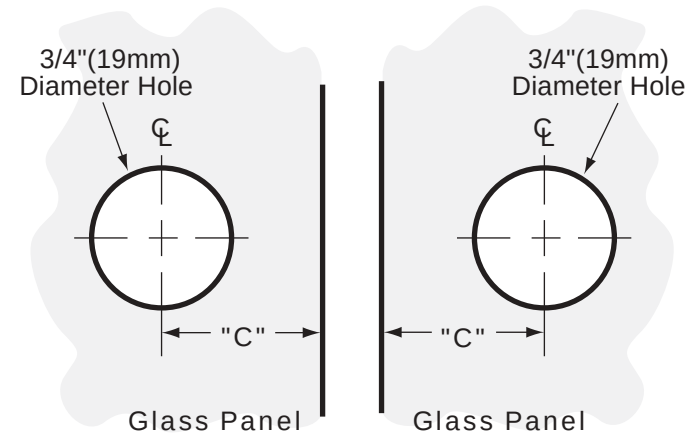


TYPICAL INSTALLATION

Important: Project measurements
from the outside of the mitered glass.

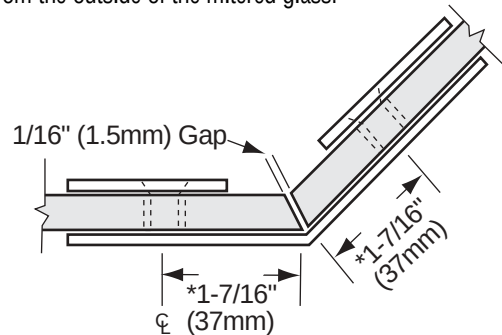

***From the Outside Edge of Miter**

TEMPLATE OPTION FOR 22-1/2° MITERED GLASS

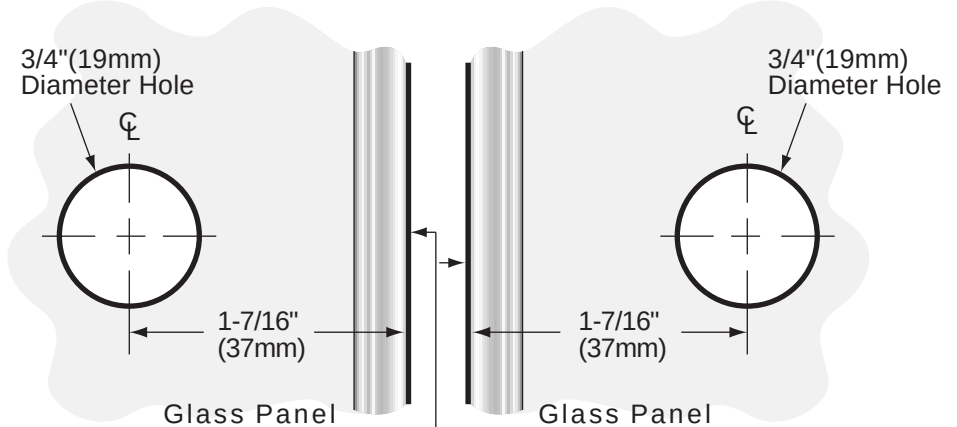

Outside Edge of Miter