






C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

TYPICAL INSTALLATION


Important: Project measurements from the edge of the glass

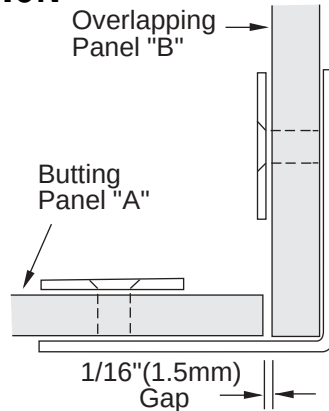

TEMPLATE OPTION FOR SQUARE CUT GLASS

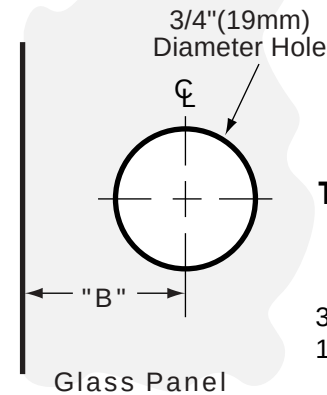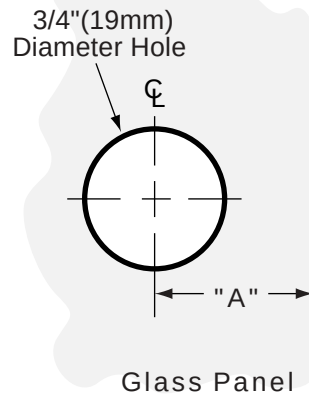

Glass Thickness	"A"* Measurement	"B"* Measurement
3/8"(10mm)	1-3/16"(30mm)	1-5/8"(41mm)
1/2"(12mm)	1-1/16"(27mm)	1-5/8"(41mm)

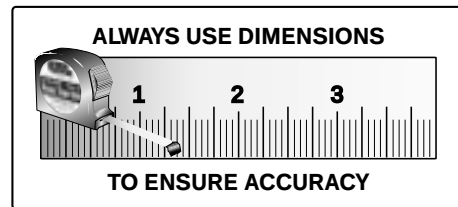

GLASS CLAMPS

The Template Options on This Page
Apply to the Following Clamps:
90° Glass Clamp
(Glass-to-Glass Application)


CAT. No.BGC90

90° Glass Clamp

CAT. No.SGC90

TYPICAL INSTALLATION


Important:
Project measurements from the outside of the mitered glass.

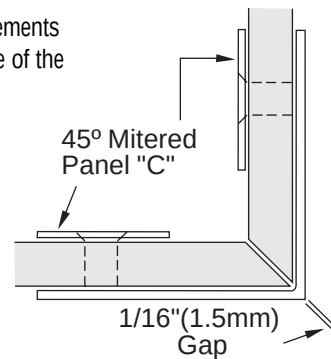

Glass Thickness	"C"* Measurement
3/8"(10mm)	1-9/16"(40mm)
1/2"(12mm)	1-9/16"(40mm)

***From the Outside Edge of Miter**

TEMPLATE OPTION FOR 45° MITERED GLASS

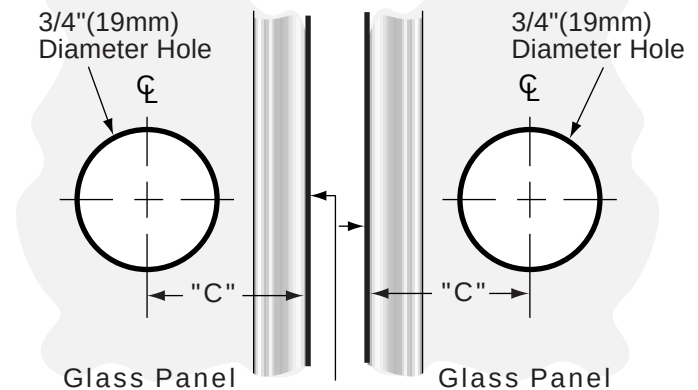

Outside Edge of Miter




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY


HEAVY DUTY GLASS CLAMPS

90° Glass Clamp
(Glass-to-Glass Application)

CAT. No.BGC90

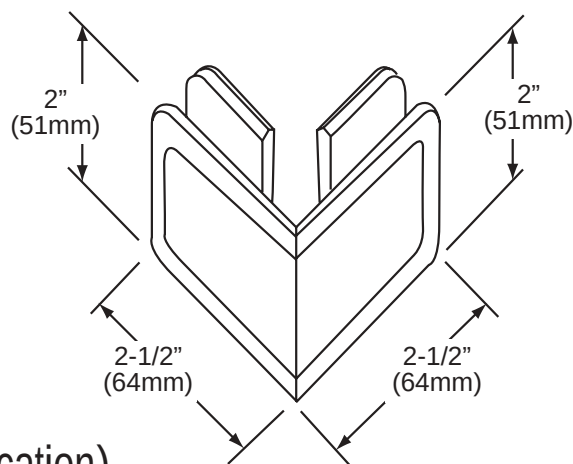

FRONT VIEW

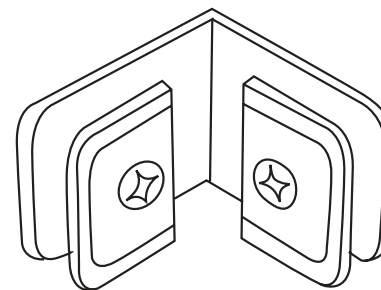

REAR VIEW

Specifications:

Material: Solid brass

Glass Thickness Range: 3/8"(10mm) to 1/2"(12mm)


Hole Size Required: 3/4" (19mm)

Includes: Mounting screws and gaskets


HEAVY DUTY GLASS CLAMPS

90° Glass Clamp
(Glass-to-Glass Application)

CAT. No.SGC90

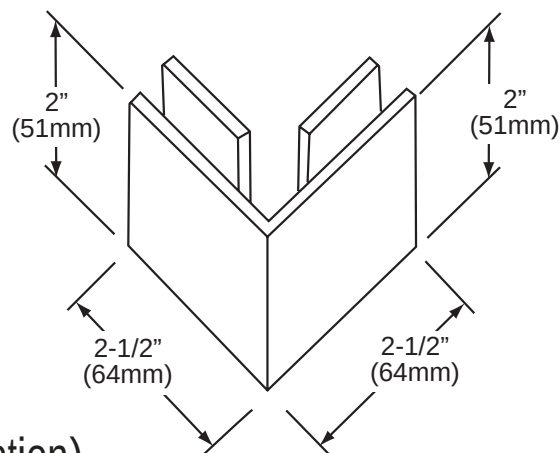

FRONT VIEW

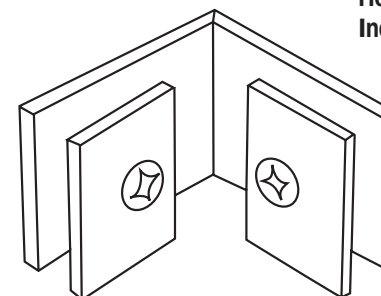

REAR VIEW

Specifications:

Material: Solid brass

Glass Thickness Range: 3/8"(10mm) to 1/2"(12mm)

Hole Size Required: 3/4" (19mm)

Includes: Mounting screws and gaskets