72 Series Balances


5/8" TUBE BALANCE

Tube diameter 9/16" but considered 5/8" in the trade.



See page 44

Tube Length

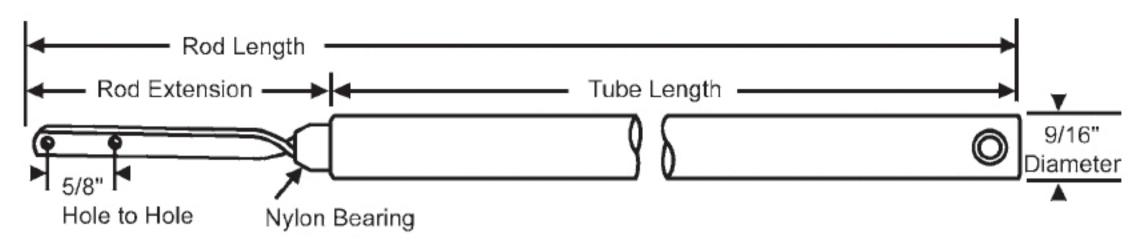

Red Bearing

Ordering Information

1) Measure metal tube length (Do not include nylon bearing).

Red Bearing

Measure spiral rod length (Make sure rod is flush with screw hole end of tube before measuring).

Rod Length

3) Identify the color of the bearing (e.g., white, red or blue) and select our corresponding part number from the chart below.

White Bearing

4) To identify the appropriate carrier or shoe to be attached and other related accessories.

Note: Attached carriers and related accessories must be ordered separately.

Tube Length

Standard Rod

White Bearing

Rod Length

Extended Rod

					70000		
10"	11-5/8"	72-P10SW		10"	12-5/8"	72-P10RW	
11"	12-5/8"	72-P11SW		11"	13-5/8"	72-P11RW	
12"	13-5/8"	72-P12SW	72-P12SR	12"	14-5/8"	72-P12RW	72-P12RR
13"	14-5/8"	72-P13SW	72-P13SR	13"	15-5/8"	72-P13RW	72-P13RR
14"	15-5/8"	72-P14SW	72-P14SR	14"	16-5/8"	72-P14RW	72-P14RR
15"	16-5/8"	72-P15SW	72-P15SR	15"	17-5/8"	72-P15RW	72-P15RR
16"	17-5/8"	72-P16SW	72-P16SR	16"	18-5/8"	72-P16RW	72-P16RR
17"	18-5/8"	72-P17SW	72-P17SR	17"	19-5/8"	72-P17RW	72-P17RR
18"	19-5/8"	72-P18SW	72-P18SR	18"	20-5/8"	72-P18RW	72-P18RR
19"	20-5/8"	72-P19SW	72-P19SR	19"	21-5/8"	72-P19RW	72-P19RR
20"	21-5/8"	72-P20SW	72-P20SR	20"	22-5/8"	72-P20RW	72-P20RR
21"	22-5/8"	72-P21SW	72-P21SR	21"	23-5/8"	72-P21RW	72-P21RR
22"	23-5/8"	72-P22SW	72-P22SR	22"	24-5/8"	72-P22RW	72-P22RR
23"	24-5/8"	72-P23SW	72-P23SR	23"	25-5/8"	72-P23RW	72-P23RR
24"	25-5/8"	72-P24SW	72-P24SR	24"	26-5/8"	72-P24RW	72-P24RR
25"	26-5/8"	72-P25SW	72-P25SR	25"	27-5/8"	72-P25RW	72-P25RR
26"	27-5/8"	72-P26SW	72-P26SR	26"	28-5/8"	72-P26RW	72-P26RR
27"	28-5/8"	72-P27SW	72-P27SR	27"	29-5/8"	72-P27RW	72-P27RR
28"	29-5/8"	72-P28SW	72-P28SR	28"	30-5/8"	72-P28RW	72-P28RR
29"	30-5/8"	72-P29SW	72-P29SR	29"	31-5/8"	72-P29RW	72-P29RR
30"	31-5/8"	72-P30SW	72-P30SR	30"	32-5/8"	72-P30RW	72-P30RR
31"	32-5/8"	72-P31SW	72-P31SR	31"	33-5/8"	72-P31RW	72-P31RR
32"	33-5/8"	72-P32SW	72-P32SR	32"	34-5/8"	72-P32RW	72-P32RR
33"	34-5/8"	72-P33SW	72-P33SR	33"	35-5/8"	72-P33RW	72-P33RR
34"	35-5/8"	72-P34SW	72-P34SR	34"	36-5/8"	72-P34RW	72-P34RR
35"	36-5/8"	72-P35SW	72-P35SR	35"	37-5/8"	72-P35RW	72-P35RR
36"	37-5/8"	72-P36SW	72-P36SR	36"	38-5/8"	72-P36RW	72-P36RR
37"	38-5/8"	72-P37SW	72-P37SR	37"	39-5/8"	72-P37RW	72-P37RR
38"	39-5/8"	72-P38SW	72-P38SR	38"	40-5/8"	72-P38RW	72-P38RR
39"	40-5/8"	72-P39SW	72-P39SR	39"	41-5/8"	72-P39RW	72-P39RR
40"	41-5/8"	72-P40SW	72-P40SR	40"	42-5/8"	72-P40RW	72-P40RR
41"	42-5/8"	72-P41SW	72-P41SR	41"	43-5/8"	72-P41RW	72-P41RR
42"	43-5/8"	72-P42SW	72-P42SR	42"	44-5/8"	72-P42RW	72-P42RR
43"	44-5/8"	72-P43SW	72-P43SR	43"	45-5/8"	72-P43RW	72-P43RR
44"	45-5/8"	72-P44SW	72-P44SR	44"	46-5/8"	72-P44RW	72-P44RR
45"	46-5/8"	72-P45SW	72-P45SR	45"	47-5/8"	72-P45RW	72-P45RR
46"	47-5/8"	72-P46SW	72-P46SR	46"	48-5/8"	72-P46RW	72-P46RR
47"	48-5/8"	72-P47SW	72-P47SR	47"	49-5/8"	72-P47RW	72-P47RR
48"	49-5/8"	72-P48SW	72-P48SR	48"	50-5/8"	72-P48RW	72-P48RR
49"	50-5/8"	72-P49SW	72-P49SR	49"	51-5/8"	72-P49RW	72-P49RR
50"	51-5/8"	72-P50SW	72-P50SR	50"	52-5/8"	72-P50RW	72-P50RR

An extra long extended rod is available with red bearings on the following sizes only:

Double Extended Rod

Tube Length	Rod Length	Part Number
15"	18-5/8"	72-P15RRR
19"	22-5/8"	72-P19RRR
21"	24-5/8"	72-P21RRR
23"	26-5/8"	72-P23RRR
27"	30-5/8"	72-P27RRR
33"	36-5/8"	72-P33RRR

Used Primarily by Keller

- The appropriate tensioning tools are 70-515 and 70-516.
- Many customers confuse this series with our 85 tilt series.
- 72 series always comes with a plastic guide attachment to the 2nd hole.

Note: Mostly "red bearings" are used for repairs. "Blue bearings" were not used on original windows but used when heavier glass was added. Blue bearing balances can be special ordered.